
VEHICLE TYPE: CONSTRUCTION SITE EXCAVATOR

Proudly developed by:




- Reduce Blind Spot Accidents
- Actively Detect Objects
- ► Easily Installed

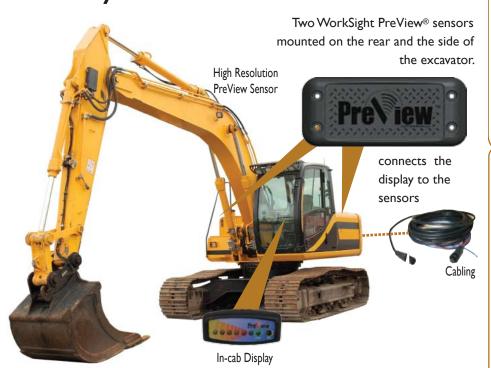

The display unit provides an audible and visual warning to the operator when an object or pedestrian is in the blind spot. This gives the driver extra time to react to prevent an accident.

NIOSH BLIND SPOT CHART





www.aps-supply.com

DIMENSIONS	SUGGESTED CONFIGURATION	SPECIFICATIONS
Sensor Unit: 4.4" (h) x 10.5" (w) x1.4" (d)	Two WorkSight® PreView Systems:	Op. Temps: -40° – +185°F / -40° – +85°C
In-Cab Display: 2.3" (w) x 2" (d) x 1"(h)	One set at 20ft/10m detection range	Current Draw: < I/2 AMP
	One set at 10ft/3m detection range	

To determine the best configuration to fit your specific vehicle and site conditions, please call 08 9248 4419, visit www.aps-supply.com, or email sales.apsa@aps-supply.com to speak to a Blind Spot specialist.

excavatorblindspot2012