

# PreView® Has Your Blind Spot Covered

VEHICLE TYPE: WHEEL LOADER

proudly developed by




- ▶ Reduce Blind Spot Accidents
- ▶ Actively Detect Objects
- ▶ Easily Installed

The display unit provides an audible and visual warning to the operator when an object or pedestrian is in the blind spot. This gives the driver extra time to react to prevent an accident.

One WorkSight PreView® sensor and one SAS Alarm is mounted on the rear of the wheel loader. When an object is detected by the sensor, the alarm is increases in audible tone to warn pedestrians outside of the vehicle of impending danger.

## NIOSH BLIND SPOT CHART

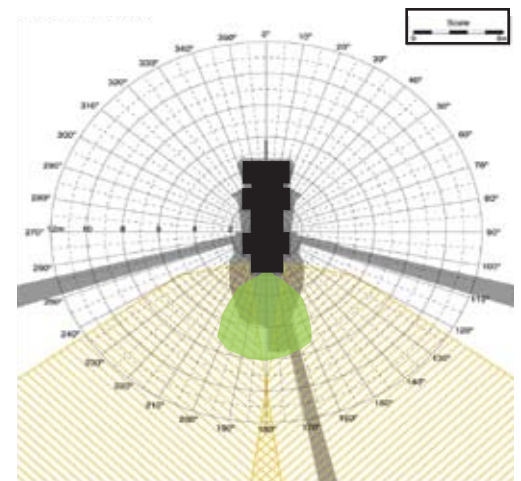

Wheel Loader  
 Blind Spot  
 PreView Coverage Area  
 Convex Mirror Visibility  
 Flat Mirror Visibility

Available Options: Replace in-cab LED display with PreView Plus camera and monitor system. Superimposes object detection indicators directly on to monitor and will support up to 4 cameras.



Feed cable to connect the display and the sensors



[www.aps-supply.com](http://www.aps-supply.com)

DIMENSIONS	SUGGESTED CONFIGURATION	SPECIFICATIONS
Sensor Unit: 4.4"(h) x 10.5"(w) x 1.4"(d)	PreView SAS with	Op. Temps: -40° – +185°F / -40° – +85°C
In-Cab Display: 2.3" (w) x 2" (d) x 1"(h)	I 12 Alarm	Current Draw: < 1 AMP
	WorkSight PreView 20ft / 6m zone	

To determine the best configuration to fit your specific vehicle and site conditions, please call 08 9248 4419, visit [www.aps-supply.com](http://www.aps-supply.com), or email [sales.apsa@aps-supply.com](mailto:sales.apsa@aps-supply.com) to speak to a Blind.Spot specialist.