

J.W. Speaker Model 795

LED Compact Work Light



Description

The Model 795 LED Amber/White Compact Work Light is constructed with robust aluminum housing and a tough polycarbonate lens, the Model 795 is designed to excel in the most demanding worksites. This durable, 4"x3", pedestal-mounted, corrosion-resistant, LED light easily fits a variety of work vehicles, ensuring continuous productivity.

The Model 795 LED Amber/White Compact Work Light is designed to help workers transport equipment between locations. With a dual-function work light: the top half is a white LED work light producing 1980 lumens and the lower half of the work light is an amber direction indicator (DI) meets ECE Regulation 148 – 1B. Rated IP67 and IP69K and engineered with tight spaces in mind, the low profile design of the Model 795 LED Compact Work Light provides a compact lighting solution for a wide range of applications.


Features and Benefits

- Available in pedestal mount option
- Powerful 1,980 effective lumens of light output in a flood pattern
- Durable polycarbonate lens is impact resistant
- Aluminum black housing is durable and corrosion-resistant
- Low-profile Dimensions: Height: 3in, Width: 4in, Depth: 1.7in
- Input Voltage: 12/24V DC
- DI meets ECE Regulation 148 1



Applications

Agriculture, Construction, Industrial, Material Handling, Mining, Off-Road 4x4, Railroad, Specialty Vehicles

Photometric

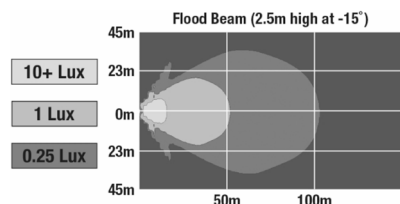

Dimensions

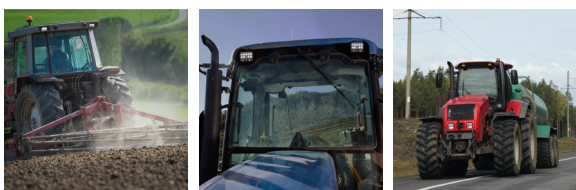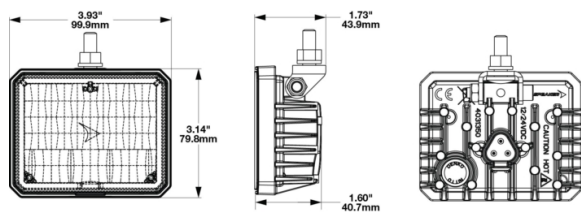

Tech Specs

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
rLumens	3540 lumens
eLumes	1980 lumens
Candela Output	3300
Nominal LED Color Temperature	5050 K
Current Draw	Amber: 0.19A @ 12V DC; 0.20A @ 24V DC White: 1.10A @ 24V DC; 2.30A @ 12V DC
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt Bracket
Mounting Type	Pedestal
Minimum Operating Temperature	65 °C / 149 °F
Maximum Operating Temperature	65 °C / 149 °F
Mating Connector	Deutsch DT06-3S
Height	79.44 mm / 3.13 in
Width	99.95 mm / 3.94 in
Depth	40.71 mm / 1.6 in
Product Weight	0.55 lbs / 0.25 kgs
Standards Compliance	CE Recognized, IEC IP67, ECE Reg 148 - 1, IEC IP69K

Part No.	Description
1604221	12-24V LED Amber/White Work Light Pedestal Mount



Authorised Importer and Master Distributor

APS USA
sales@aps-supply.com
P: 1 619 263 4164

APS Australia
sales.apsa@aps-supply.com
P: 61 (8) 9302 2369 (WA)
P: 61 (02) 4915 6781 (NSW)

APS Colombia
ventascolombia@aps-supply.com
T: 57 (4) 444 7275

APS Chile
ventaschile@aps-supply.com
T: 56 (2) 2948 8044

APS Perú
ventasperu@aps-supply.com
T: 56 (2) 2948 8044

APS Indonesia
techcenter@aps-supply.com



APS Contact Page