

PEGASUS LED Beacon

10-30V DC | 9W | SAE Class II | ECE R10, ECE R65 | Rotating / Flashing Patterns



D14500



D14756



D14502



D14758




D14501





D14757


Line Drawing

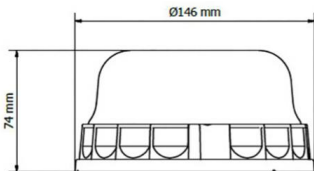

D14500

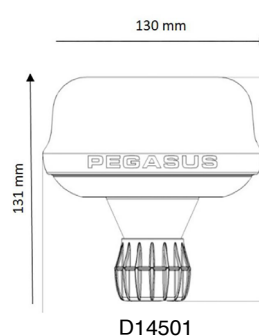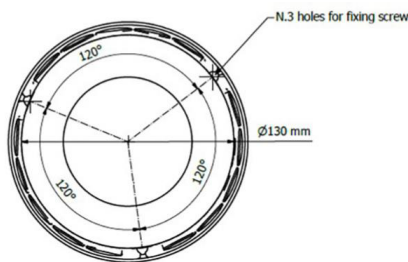

D14501

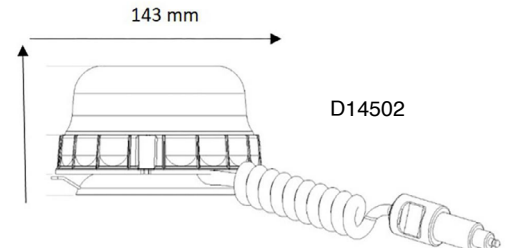

D14502

Description

The PEGASUS LED beacon offers multiple flash patterns including flash, double flash, and rotating. All part numbers for this beacon are ECE R65 approved, with the flash versions also meeting SAE Class II standards. With its compact design, the PEGASUS is versatile and durable making it suitable for various applications where space is limited and a powerful warning light is needed.

Features and Benefits

- Low-profile compact beacon
- 10-30V DC
- High-efficiency only 9W
- 3 flash patterns to choose from (Rotating, Flash, Double Flash)
- 3 bolt permanent mount / Din pole mount / Vacuum mag-mount with cigarette plug
- Certifications: SAE Class II, ECE R10, ECE R65

Applications

On-Road and Construction Sites, Mining and Agriculture, and Municipal / Utility

Tech Specs

Product Type	Complete lamp
Voltage	10-30V DC
Source	LED
Consumption	9W
Colour	D14500 / D14501 / D14502: Amber / Orange, D14756 / D14757 / D14758: Crystal lens, Amber LED
Connector	D14500 / D14756: ISO DIN 14620B D14501 / D14757: ISO 4148/4165
Mounting	D14500 / D14756: 3 screws 3.5 x 15.9 mm D14501 / D14757: Flexible DIN pole autoblok D14502 / D14758: Magnetic 1 suction pad with cigarette lighter
Lens Material	Polycarbonate
Housing Material	D14500 / D14502 / D14756 / D14758: Compound thermoplastic
Diameter	D14500: 146 mm D14501 / D14757: 130 mm D14502 / D14756 / D14758: 143 mm
Height	D14500 / D14502 / D14756 / D14758: 74 mm D14501 / D14757: 131 mm
Weight	D14500 / D14756: 0,36 Kg D14501 / D14757: 0,38 Kg D14502 / D14758: 0,81 Kg
IP Protection	D14756 / D14757 / D14758: IP54
Flash Patterns	Rotating / Flash / Double Flash
Flash per Minute	125
Operation Temperatures	-30°C to +50°C
Certifications	SAE J85 Claas II, ECE R10, ECE R65

VIGNAL
LIGHTING GROUP
Authorised Importer and Master Distributor

APS USA
sales@aps-supply.com
P: 1 619 263 4164

APS Australia
sales.apsa@aps-supply.com
P: 61 (8) 9302 2369 (WA)
P: 61 (02) 4915 6781 (NSW)

APS Colombia
ventascolombia@aps-supply.com
T: 57 (4) 444 7275

APS Chile
ventaschile@aps-supply.com
T: 56 (2) 2948 8044

APS Perú
ventasperu@aps-supply.com
T: 56 (2) 2948 8044

APS Indonesia
techcenter@aps-supply.com



PEGASUS LED Beacon

SAE Class 2 LED

Accessories



D14777



D14747



D14503



D14511



D14512



D14513



D14514



D14515



D14516

Part No.	Description
D14500	PEGASUS amber multi-pattern flash/double flash/rotator 3 bolt permanent mount 10-30V
D14501	PEGASUS amber multi-pattern flash/double flash/rotator pipe mount 10-30V
D14502	PEGASUS amber multi-pattern flash/double flash/rotator vacuum mount 10-30V
D14756	PEGASUS clear multi-pattern flash/double flash/rotator 3 bolt permanent 10-30V
D14757	PEGASUS clear multi-pattern flash/double flash/rotator pipe mount 10-30V
D14758	PEGASUS clear multi-pattern flash/double flash/rotator vacuum mount 10-30V

Part No.	Accessories Description
D14777	Amber lens for PEGASUS LED beacon
D14747	Crystal lens for PEGASUS beacon
D14503	Amber lens for PEGASUS LED multifunction beacon
D14511	Flast gasket
D14512	Tilted gasket
D14513	Socket to be screwed, ISO 4148/4165
D14514	Socket with central clamp, ISO 4148/4165
D14515	360° rotating socket, ISO 4148/4165

OEM cross reference numbers
Kubota Tractor: W20TS01684



APS USA
 sales@aps-supply.com
 P: 1 619 263 4164

APS Australia
 sales.apsa@aps-supply.com
 P: 61 (8) 9302 2369 (WA)
 P: 61 (02) 4915 6781 (NSW)

APS Colombia
 ventascolumbia@aps-supply.com
 T: 57 (4) 444 7275

APS Chile
 ventaschile@aps-supply.com
 T: 56 (2) 2948 8044

APS Perú
 ventasperu@aps-supply.com
 T: 56 (2) 2948 8044

APS Indonesia
 techcenter@aps-supply.com

Authorised Importer and Master Distributor



APS Contact Page