

Vision X Tremor XD LED Beacon Small



Description

Specifically designed to thrive in the super harsh environment of mines, the Tremor XD Small mining strobes are rated to IP69K and IP67. Featuring a die-cast aluminum base and virtually unbreakable polycarbonate lens, these strobes are made to last. They can be washed with a pressure washer and steam cleaned without compromising the product.

Features and Benefits

- 5 Flash Patterns including Rotator and Flash
- Heavy duty die-cast aluminum base and polycarbonate lens
- Advanced circuitry and high output LEDs
- Smooth external lens to prevent external dust and dirt buildup

Applications

Civil and construction, commercial, material handling, industrial, fleets, above ground or below ground mining.

Tech Specs

LED	8 x 5W
Flash Patterns	6 Selectable - Rotator (SAE/ECE), Rotator Quint Flash, Single Flash (SAE), Quint Flash, Ultra Flash, Steady On
Wattage	40W
Amp Draw	2.0 @ 12V
Operating Voltage	9-80V DC
Operating Temp	-30°C ~ +80°C
Lifespan	50,000 hrs
Housing Material	Aluminum Base
Lens Material	Polycarbonate
Shock/Vibration	ISO 16750-3, MIL-STD-810G
Approvals	CE, ROHS, REACH
Ingress Protection	IP67, IP69K
ECE Approval	ECE R65 TA1, ECE R10
EMC Compliance	CISPR25 Class 3
SAE Compliance	J845 Class 1, W3-1
Fixture Weight	1.3lbs (0.6kg)
Mounting	4-Bolt Flange
Warranty	7 years


KEY FEATURES:




Beam Patterns

7 FLASH PATTERNS

- Rotates in either direction at 120 RPM
- Night Mode - Day/Night mode switching via third wire

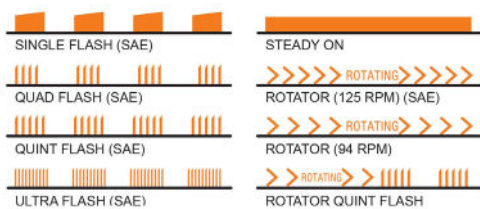

Line Drawing

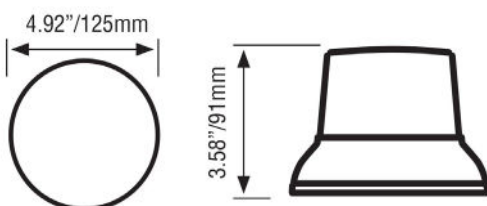

Part No. Description

TREM-85250A	Amber, 16x3W LEDs, 4-Bolt Flange, 1.3lbs, 12-24V, 40W, 2A
TREM-85250AC	Clear, 16x3W LEDs, 4-Bolt Flange, 1.3 lbs, 12-24V, 40W, 2A



Authorised Importer and Master Distributor



APS USA
sales@aps-supply.com
P: 1 619 263 4164

APS Australia
sales.apsa@aps-supply.com
P: 61 (8) 9302 2369 (WA)
P: 61 (02) 4915 6781 (NSW)

APS Colombia
ventascolombia@aps-supply.com
T: 57 (4) 444 7275

APS Chile
ventaschile@aps-supply.com
T: 56 (2) 2948 8044

APS Perú
ventasperu@aps-supply.com
T: 56 (2) 2948 8044

APS Indonesia
techcenter@aps-supply.com



APS Contact Page