

Golight Stryker ST Series

Remote-controlled Spot and Flood Lights

The Stryker™ remote-controlled light is a 2-Speed LED searchlight with directional flexibility, which gives the operator a full 370° horizontal rotation and a 135° vertical tilt with fingertip control. Provides superior light penetration with the new LED/PVEX lens technology.

Features and Benefits

- 10 high-flux LEDs
- Wireless or hardwired remote control options
- Permanent or portable mounting options
- 370° rotation x 135° Tilt
- 544,000 Candela, 4,839 ft (1,475 m)
- 3.7A @ 13.8V
- 8° beam angle
- UV ray and saltwater resistant
- Weather-proof for land and sea applications
- Stainless steel mounting brackets for permanent mount units



Applications


Work and service vehicles, 4WD and recreational vehicles, military vehicles, emergency services, marine vessels

Tech Specs

| | |
|----------------------------|---|
| Type | 10 high-flux LEDs |
| Beam | 8° beam angle |
| Lens | P-Vex lens technology |
| Voltage | 12V DC |
| Wattage | 40W |
| Current Draw | 3.7A @ 12V DC |
| Max Beam Distance | 4,839 ft (1,475 m) max beam distance |
| Peak Beam Intensity | 544,000 Candela |
| Heat Sink | Anodized aluminium heat sink w/liquid powder-cast finish |
| Motors | Automotive grade 12V D.C. High Torque, R.P.M. 6087 Constant Torque 17.133 mN.m/amp, Stall:12.31 mN.m Draw point 4 amps Output: 1.96 watts w/built in stall protection circuitry Built in stall protection circuitry |
| Colour Options | White, Chrome and Black |
| Housing | ASA Luran heat resistant High impact, UV resistant material |
| Gears & Transmission Parts | Lexan and Brass |
| Fasteners | Stainless Steel |
| Wireless Remote Controls | Radio Frequency: 2.4 GHz Code match pairing process Batteries: 2 AAA |
| Mount | Permanent mount or portable magnetic base |
| Dimensions (D x W x H) | 7x7x6.5" (177.8x177.8x165mm) |
| Warranty | 5 year limited warranty |



LED Light Beam Dimensions

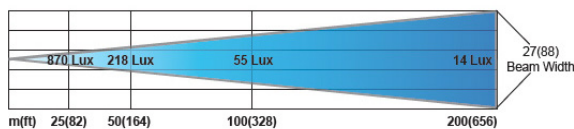

ILLUMINANCE (Lux) 870 218 55 14

Peak Beam Intensity: 544,000 Candela

Maximum Beam Distance: 1,475 m / 4,839 ft

Beam Angle: 8°



| Part No. | Description |
|----------|---|
| 30004ST | White, LED, Permanent Mount, Wireless Handheld Remote |
| 30514ST | Black, LED, Permanent Mount, Wireless Handheld Remote |
| 30064ST | Chrome, LED, Permanent Mount, Wireless Handheld Remote |
| 30005ST | White, LED, Portable/Magnetic Base, Wireless Handheld Remote |
| 30515ST | Black, LED, Portable/Magnetic Base, Wireless Handheld Remote |
| 30065ST | Chrome, LED, Portable/Magnetic Base, Wireless Handheld Remote |

Authorised Importer and Master Distributor



APS USA
sales@aps-supply.com
P: 1 619 263 4164

APS Australia
sales.apsa@aps-supply.com
P: 61 (8) 9302 2369 (WA)
P: 61 (02) 4915 6781 (NSW)

APS Colombia
ventascolombia@aps-supply.com
T: 57 (4) 444 7275

APS Chile
ventaschile@aps-supply.com
T: 56 (2) 2948 8044

APS Perú
ventasperu@aps-supply.com
T: 56 (2) 2948 8044

APS Indonesia
techcenter@aps-supply.com



APS Contact Page