



J.W. Speaker Model 220 LED Signal Lights 0338101

6" x 3" LED Stop, Tail & Turn Signal Light

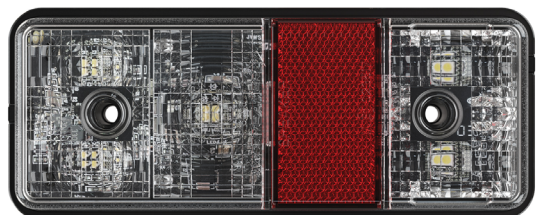

Dimensions

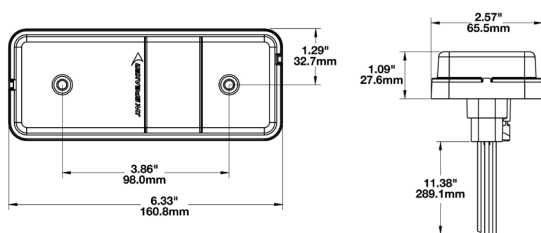

Part No.	OE Part No.	Description
0338101	7377264 / 7459145	J.W. Speaker Model 220 12-24V ECE LED Stop, Tail & Turn Signal Light

Part No.	OE Part No.	Model Compatibility
0338101	7377264	Toolcat Utility Work Machines UW53, UW56 Compact Track Loaders T450, T550, T590, T595
	7459145	Skid-Steer Loaders S450, S510, S530, S550, S570, S590, S630, S650
		Skid-Steer Loaders S460, S560
		T460, T530, T560



Description

The Model 220 is a rectangular stop, tail & turn light designed with premium performance LEDs for a highly visible signal for maximum safety. This compact combination lamp has a total of 4 functions in addition to reflex reflectors: (1) rear turn, (2) tail light, (3) stop light, (4) reverse. Molded of rugged polycarbonate, these lamps are perfect for off-road agricultural and industrial vehicles.

Features and Benefits

- UV-resistant polycarbonate lens
- Low profile mount
- DC electrical configurations

Applications

Agriculture, Automotive, Construction, Industrial, Marine, Off-Road 4x4, Powersports, Specialty Vehicles, Truck & Bus

Tech Specs

Input Voltage	12-24V DC
Operating Voltage	6-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
White Wire	Reverse
Red Wire	Stop
Brown Wire	Tail
Yellow Wire	Turn
Current Draw	0.16A @ 12V DC (Stop) 0.10A @ 24V DC (Stop) 0.02A @ 12V DC (Tail) 0.01A @ 24V DC (Tail) 1.42A @ 12V DC (Turn) 0.71A @ 24V DC (Turn) 0.14A @ 12V DC (Backup) 0.07A @ 24V DC (Backup)
Beam Pattern(s)	Signalization - Stop Signalization - Tail Signalization - Turn (Rear)
Height	160.78 mm / 6.33 in
Width	66.04 mm / 2.6 in
Depth	27.94 mm / 1.1 in
Shape	Rectangle
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Type	Panel Mount
Operating Temperature	-40 °C (-40 °F) – 65 °C (149 °F)
Connector or Wiring	Integral DT04-6P
Mating Connector	DT06-6S
Product Weight	0.40 lbs / 0.18 kgs
Shipping Weight	2.40 lbs / 1.09 kgs
Additional Information	Includes an ECE Reg 3 Class 1 Reflex
Certifications & Compliance	Buy America Standards, ECE Reg 3, ECE Reg 6, ECE Reg 7, ECE Reg 23, Eco Friendly, IEC IP67



Authorised Importer and Master Distributor

APS USA
sales@aps-supply.com
P: 1 619 263 4164

APS Australia
sales.apsa@aps-supply.com
P: 61 (8) 9302 2369

APS Colombia
ventascolombia@aps-supply.com
T: 57 (4) 444 7275

APS Chile
ventaschile@aps-supply.com
T: 56 (2) 2948 8044

APS Perú
ventasperu@aps-supply.com
T: 56 (2) 2948 8044

APS Indonesia
techcenter@aps-supply.com



APS Contact Page